



RWY	DIRECTION	THR	BEARING STRENGTH
02C	020°	49°01'16,61"N 017°26'02,34"E	PCN 33/R/B/X/T
20C	200°	49°02'15,10"N 017°26'44,56"E	
02R	020°	49°01'24,64"N 017°26'13,58"E	25000 kg/0,70 MPa
20L	200°	49°02'03,10"N 017°26'41,34"E	
02L	020°	49°01'28,24"N 017°26'05,28"E	25000 kg/0,70 MPa
20R	200°	49°02'06,70"N 017°26'33,04"E	
TAXIWAYS	TWY A		PCN 33/R/B/X/T
	TWY B		PCN 20/F/B/X/T

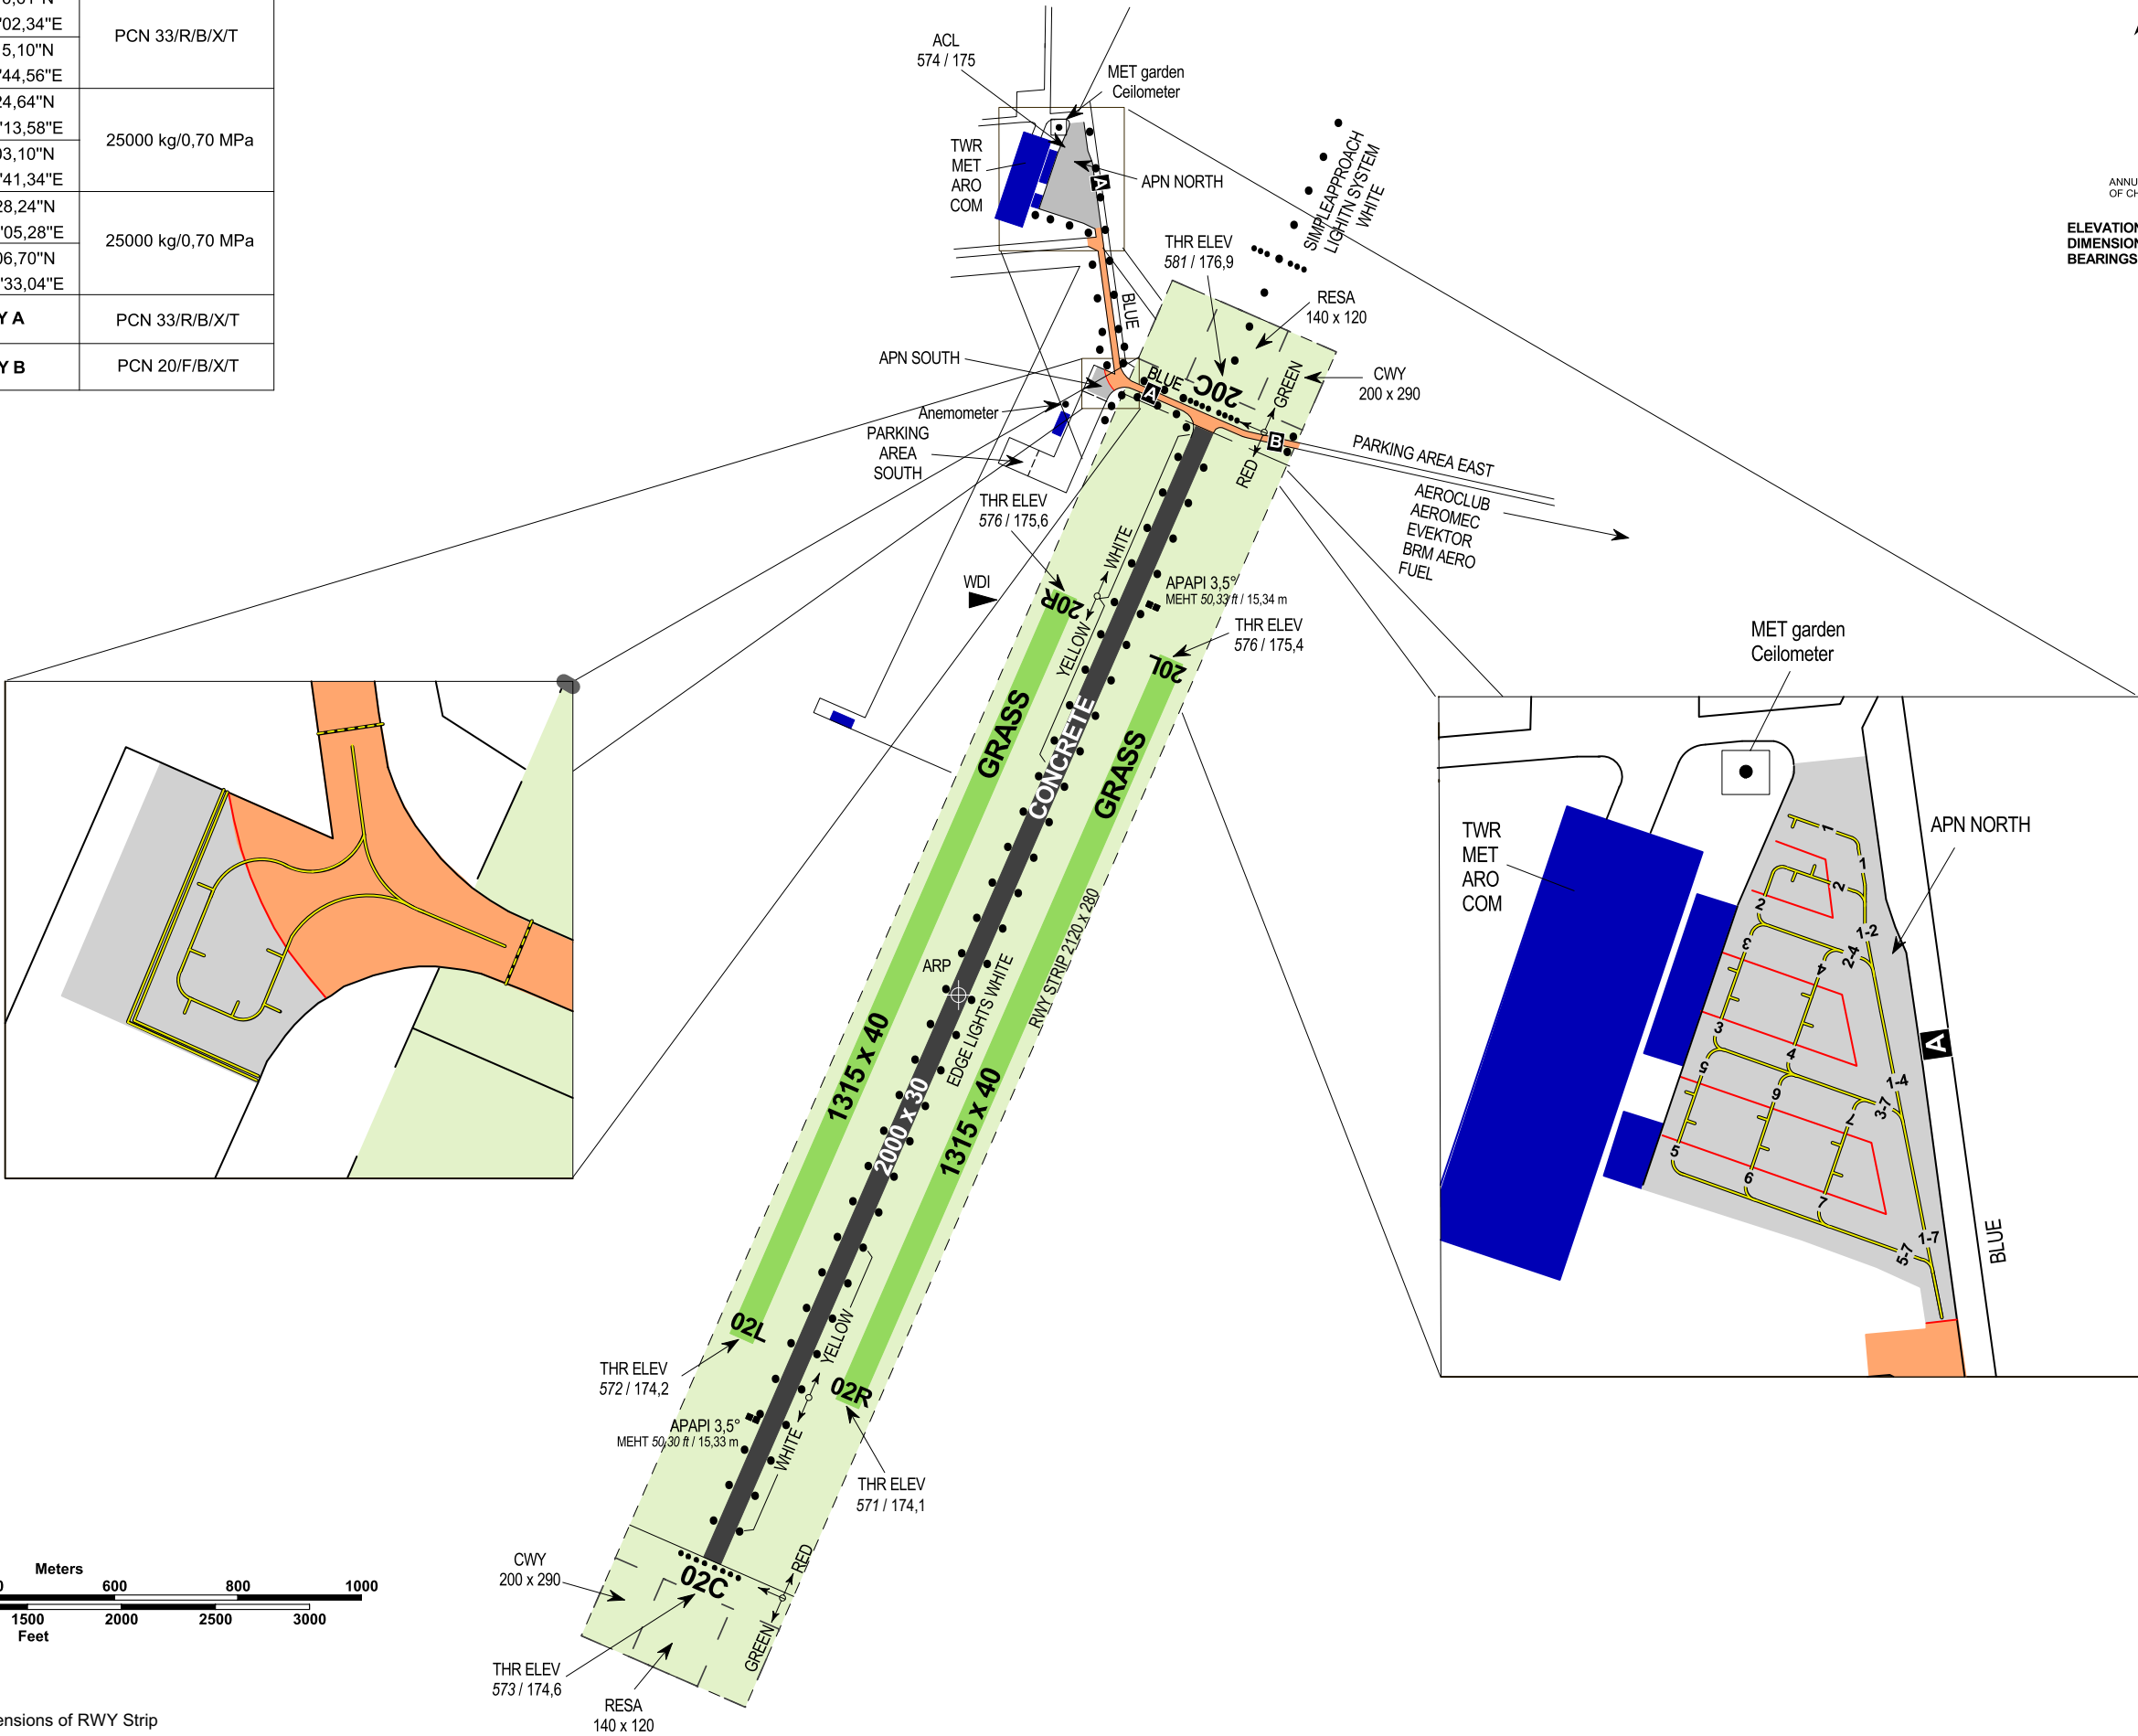

change: THR RWY 02R ELEV; dimensions of RWY Strip

AERODROME CHART - ICAO - MARKINGS ON MANOEUVRING AREA

KUNOVICE

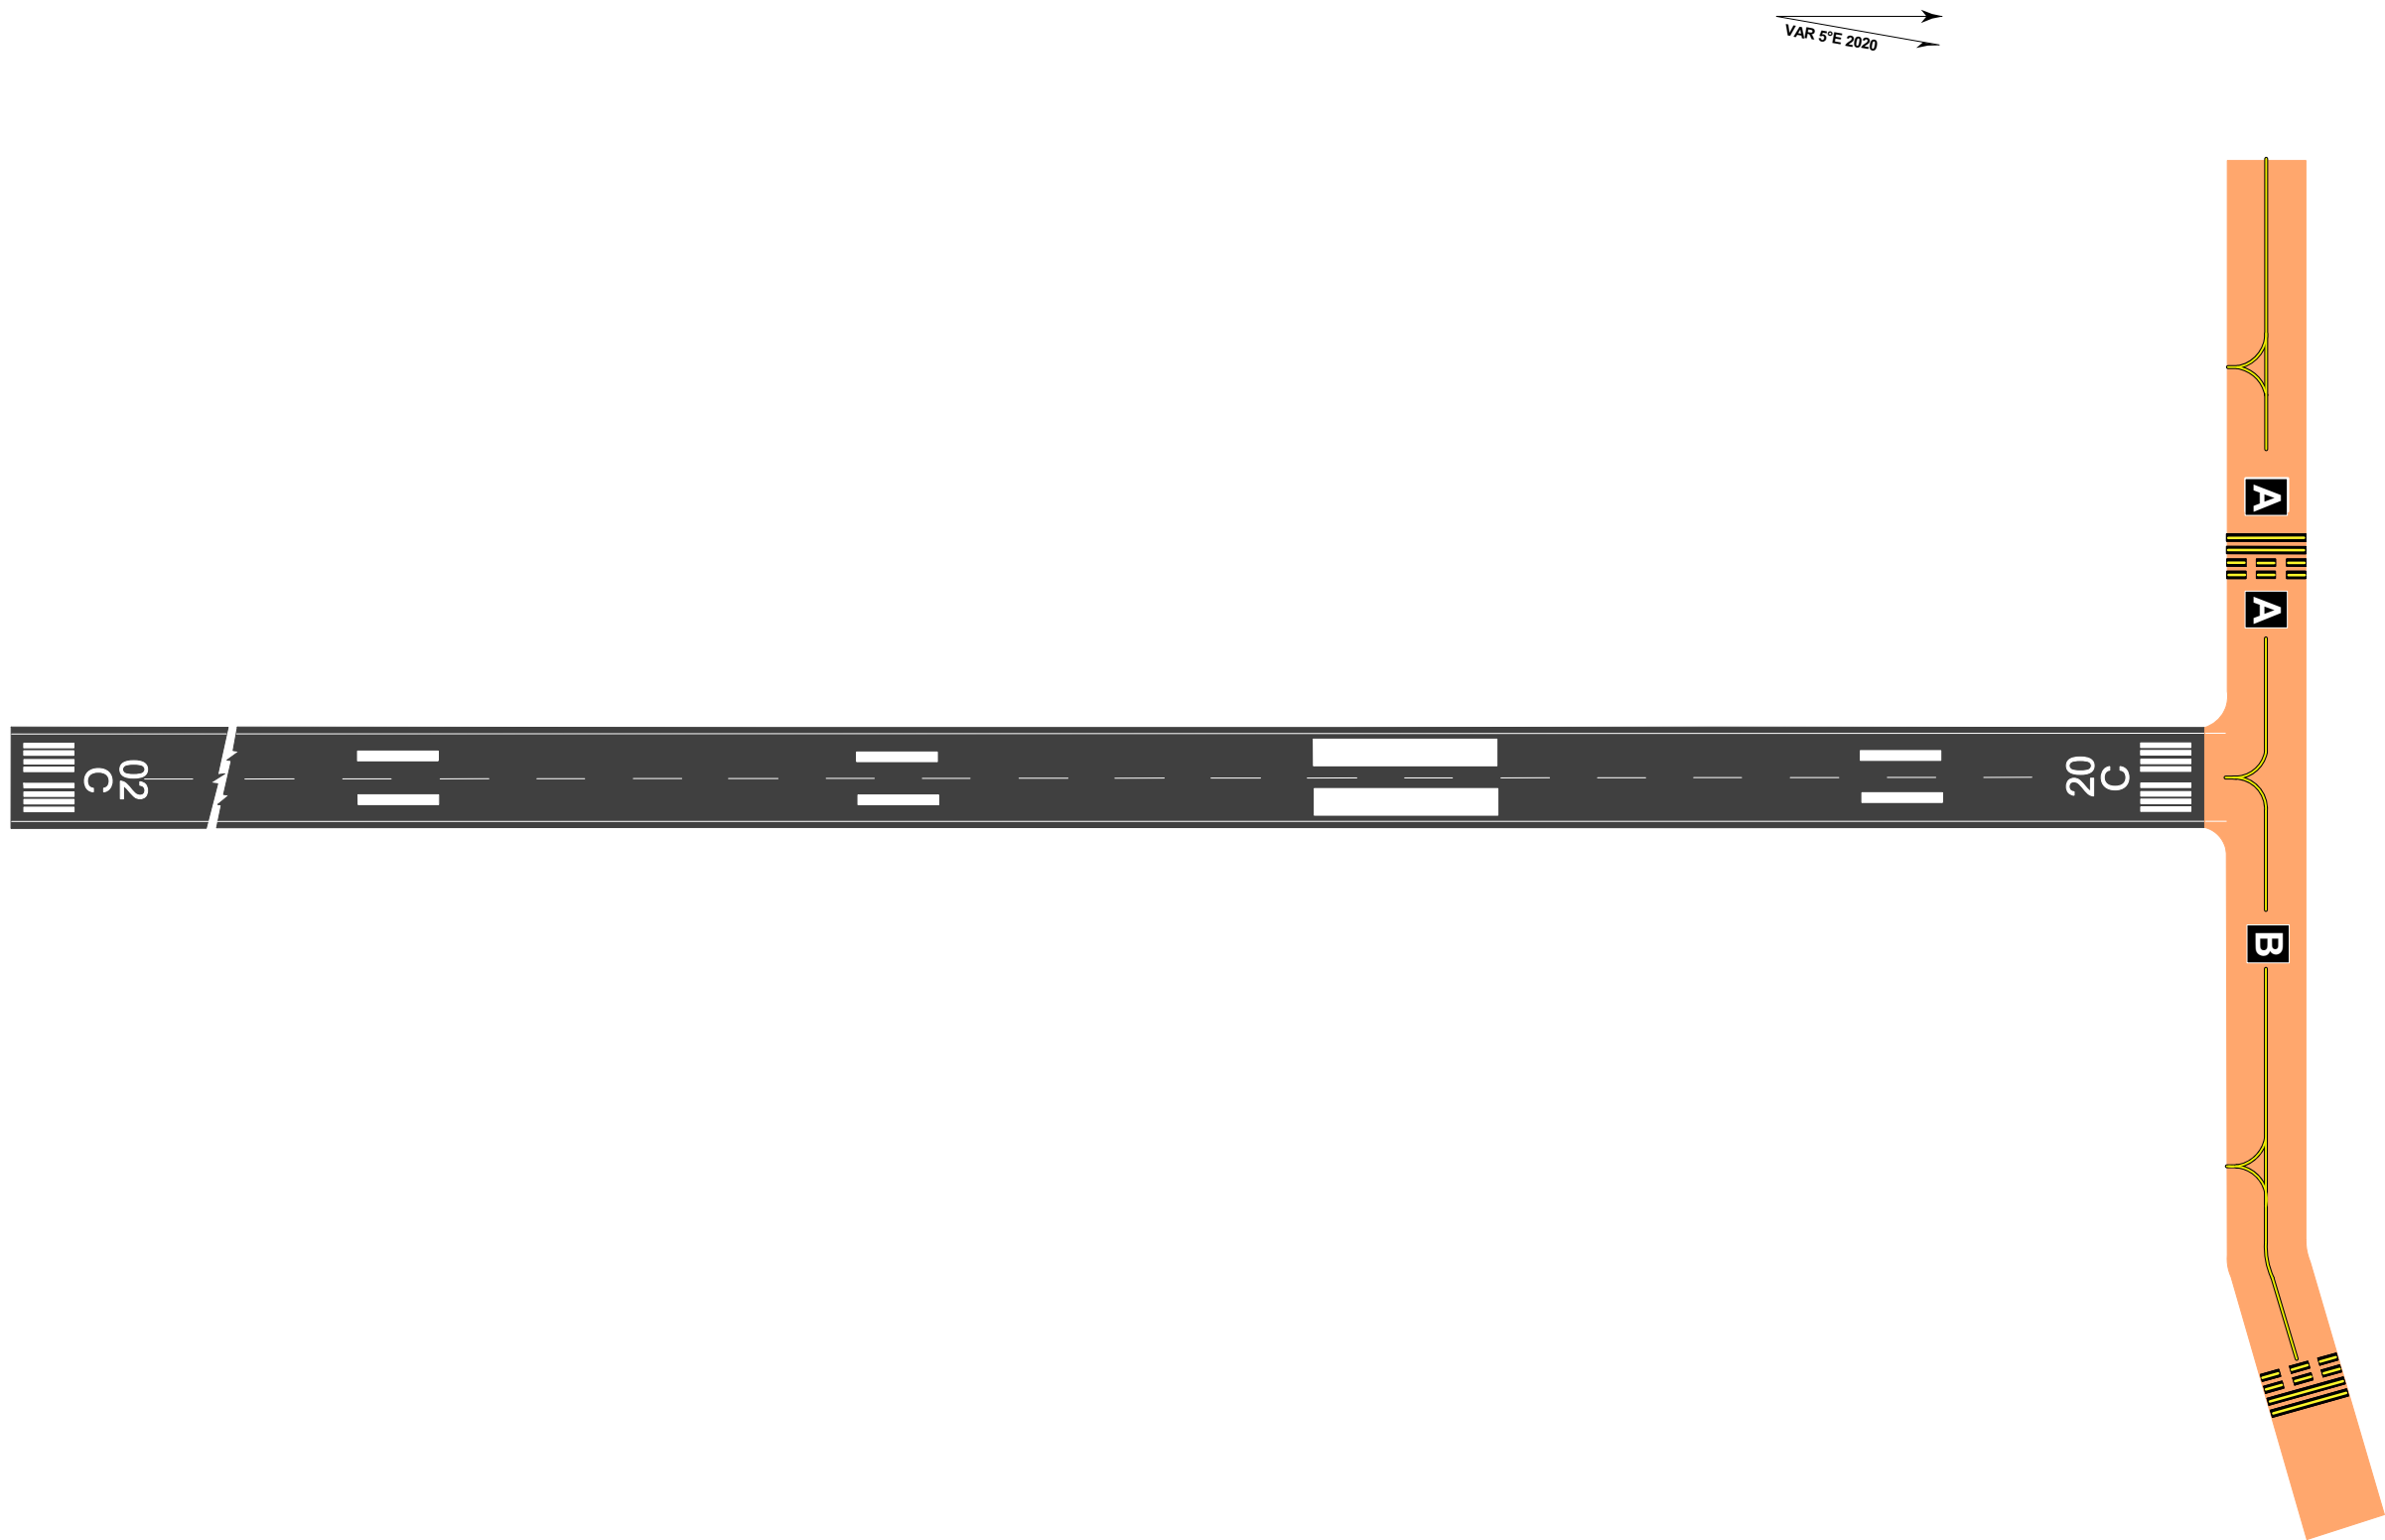

change: correction of MAG VAR