



INSTRUMENT APPROACH CHART - ICAO

AERODROME ELEV **1234**
THR RWY 24 ELEV **1158**
OCH RELATED TO THR RWY 24

PRAHA RADAR 127,580
RUŽYŇĚ RADAR 119,010
SUPPLEMENTARY FREQ 136,080
121,500
134,560
RUŽYŇĚ TOWER
SUPPLEMENTARY FREQ 118,110
121,500



PRAHA/Ružyně
ILS
RWY 24

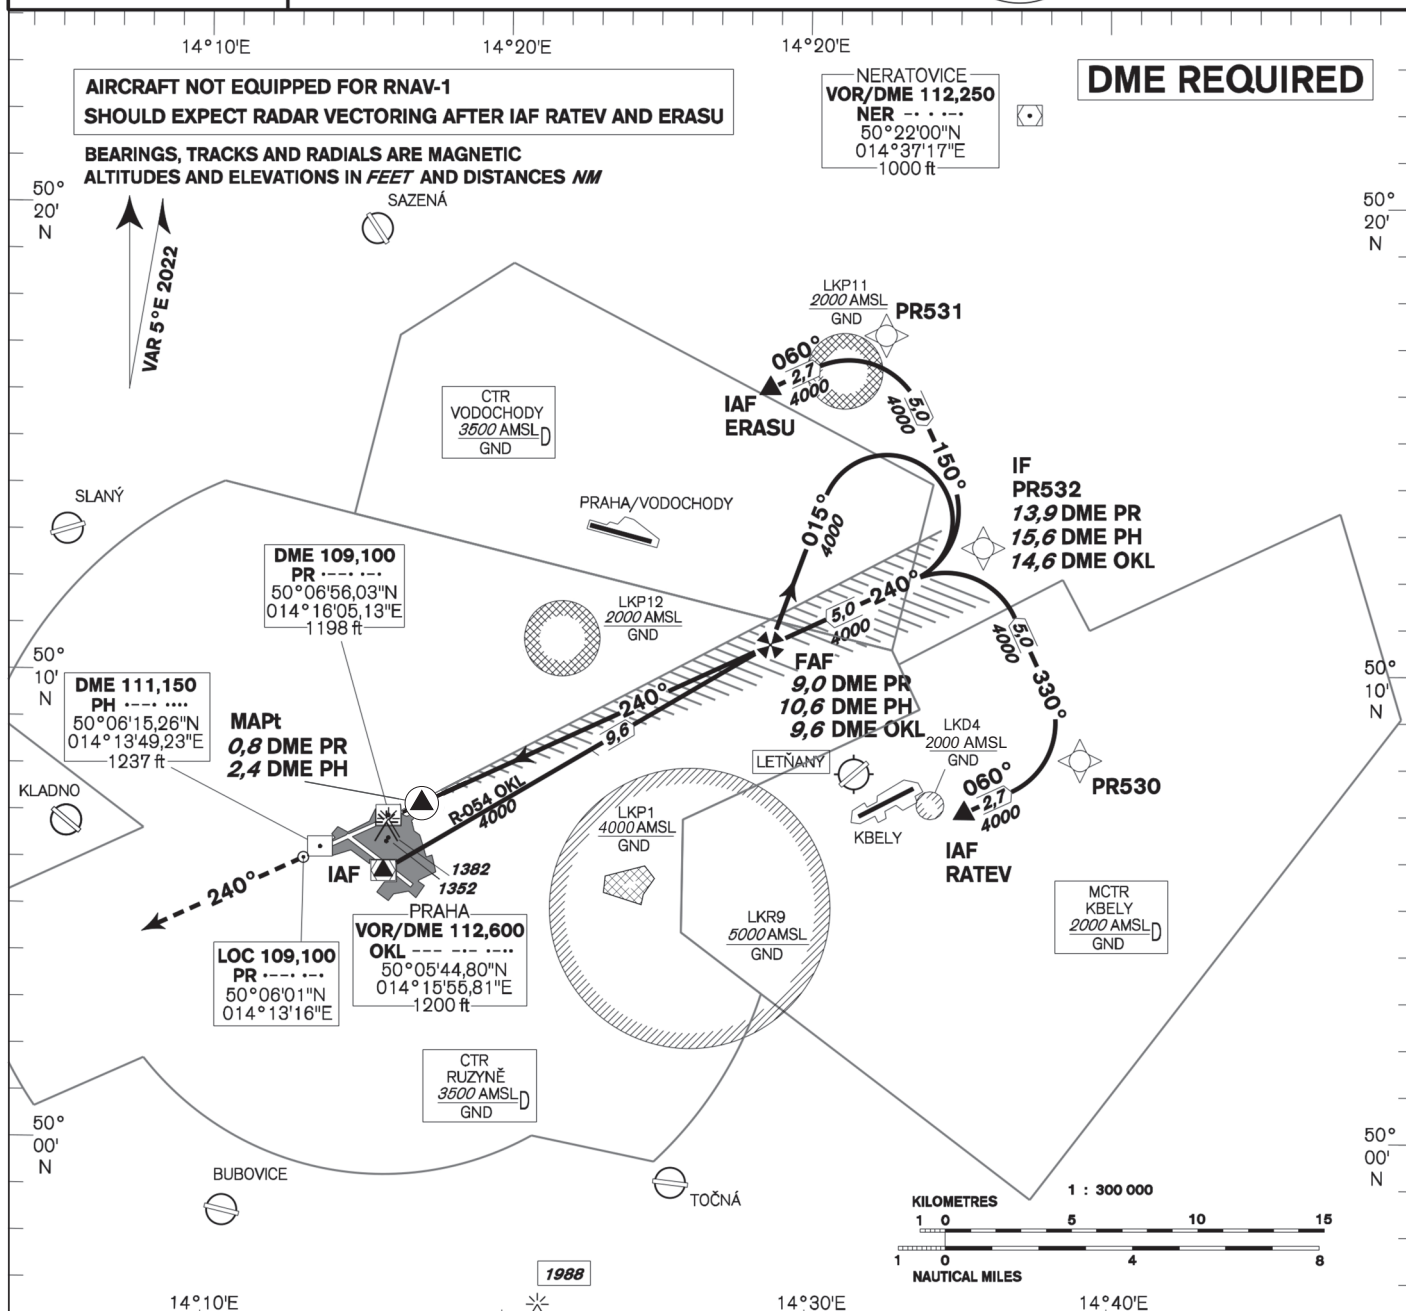

MISSED APPROACH:

Climb on track 240° to 4000ft, radar vectoring will be provided.

In case of RCF climb on track 240° to 4000ft, at 10NM DME OKL turn right to OKL and climb to 5000ft.

THR 500657.42N, 0141624.12E
ELEV 1158

TRANSITION ALTITUDE
5000ft

OCA/OCH		A	B	C	D
Straight-in Approach	Cat I	ft 1304 / 146	1314 / 156	1324 / 166	1335 / 177
	Cat II	ft 1217 / 59	1226 / 68	1235 / 77	1249 / 91
	LOC	ft 1510 / 350			
Circling		see the circling approach chart			

DME PR	NM	9	8	7	6	5	4	3	2	1
DME PH	NM	10,6	9,6	8,6	7,6	6,6	5,6	4,6	3,6	2,6
DME OKL	NM	9,6	8,6	7,7	6,7	5,7	4,7	3,7	2,8	1,9
DIST THR	NM	8,8	7,8	6,8	5,8	4,8	3,8	2,8	1,8	0,8
ALTITUDES	ft	4010	3690	3380	3060	2740	2420	2100	1780	1470

FAF - MAPt 8,2 NM	kt	80	100	120	140	160	180
min:sec	6:09	4:55	4:06	3:31	3:04	2:44	
Rate of descent (5,24%)	ft/min	420	530	640	740	850	960

CAT III approved.

change: vertical limits of LKD4

Timing is not authorized for defining the MAPt.