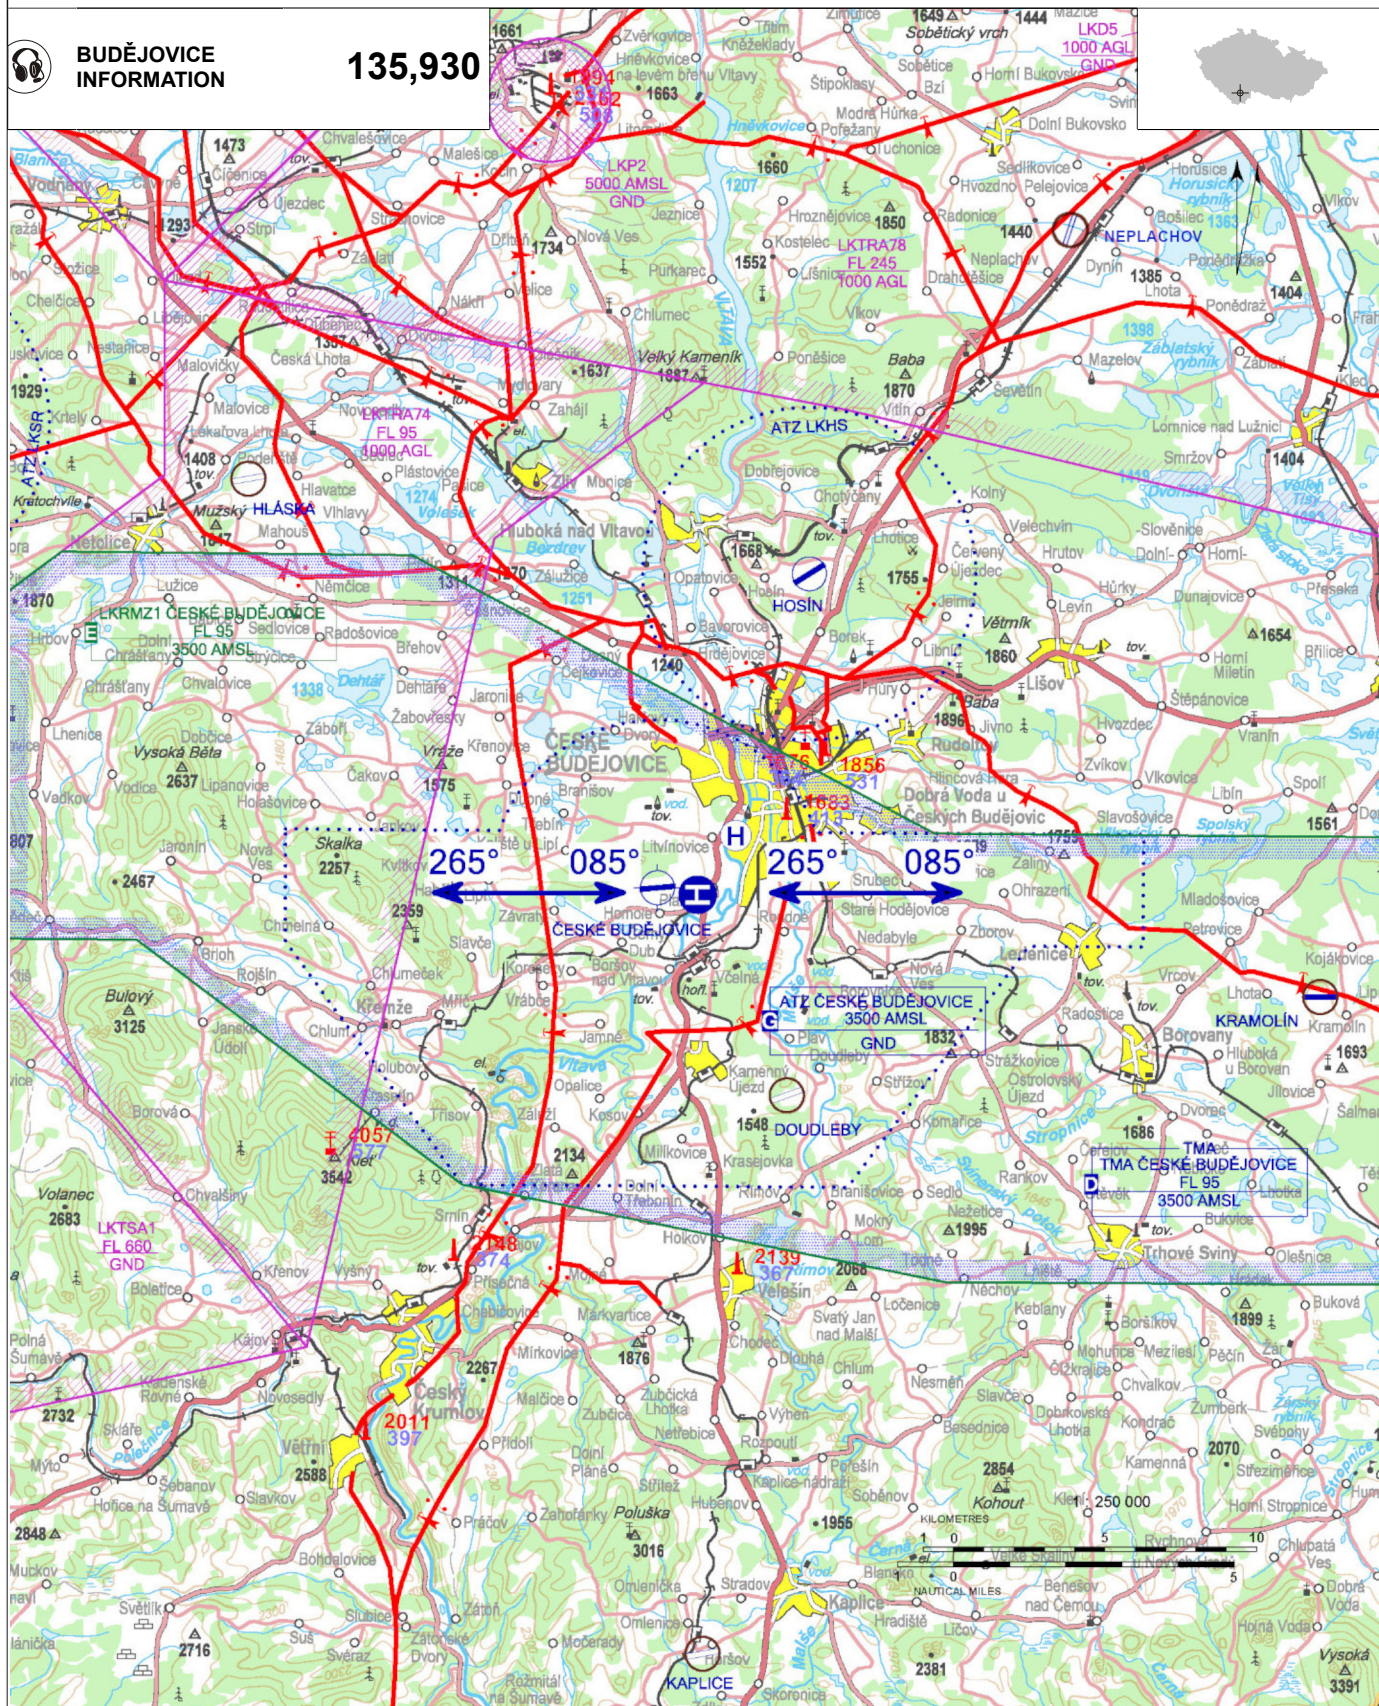


LKCA - České Budějovice - Základna HEMS

Private domestic heliport HEMS

VFR day/night

48 56 40,06 N, 014 26 42,49 E POS: 4 km SSW České Budějovice town center ELEV: 1340 ft / 408 m


**BUĎEJOVICE
INFORMATION**
135,930


Only HEMS helicopter flights or flights agreed upon with the heliport operator are allowed.

Descent gradient 1000 ft / 1 NM.

Heliport lighting system control is provided primarily remotely by radio signal from the helicopter deck (by keying on FREQ 135,460) as follows:

3x within 5 seconds - intensity 10%

5x within 5 seconds - intensity 30%

7x within 5 seconds - intensity 100%

All lights turn off automatically 15 minutes after the radio remote control command. Secondly, the SZZ can be controlled locally from the heliport operator's workplace (☎ +420 491 614 848).

LKCA - České Budějovice - Základna HEMS




BUDĚJOVICE

INFORMATION

135,930

surface-level HEMS heliport value „D“ - 17 m
FATO – circle diameter 26 m, grass
SA – circle diameter 44 m, grass
TLOF 1 – square 10 m x 10 m, concrete, strength 6000 kg / 0,4 MPa
TLOF 2 - square 10 m x 10 m, concrete, strength 6000 kg / 0,4 MPa

WDI (50 m ESE)
FATO: marking/lights FATO, marking/lights of aiming point, recognition marking
TLOF 1: marking/lights TLOF, stand marking
TLOF 2: marking TLOF, stand marking
A-PAPI: 9,3°
ALS: shortened, length 25 m
Beacon

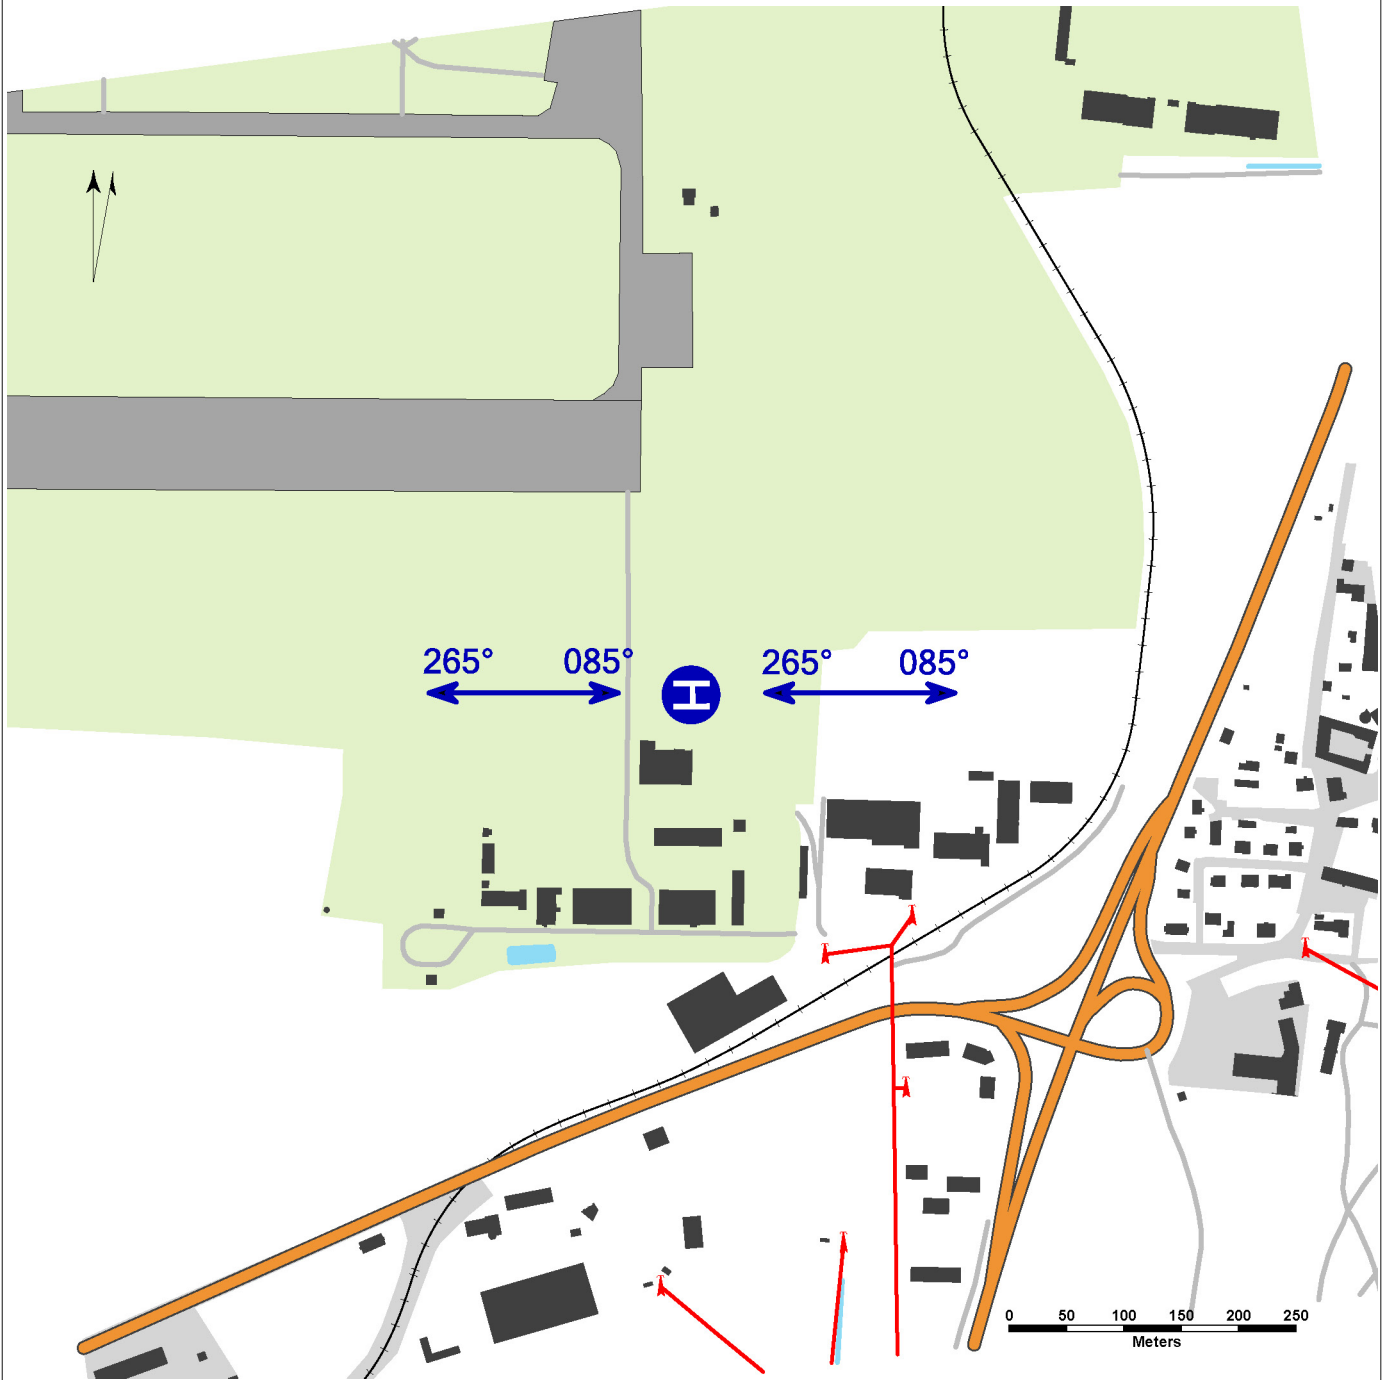

Underlying data © ČÚZK



Zdravotnická záchraná služba Jihočeského kraje

B. Němcové 1931/6, 370 01 České Budějovice,  +420 602 118 465, benesm@zszsjck.cz

Responsible person of the operator: Ing. Robert Rajtmajer  +420 602 888 361, robert.rajtmajer@seznam.cz

Heliport service - HEMS Operations technician  +420 491 614 848

	Approach:	Take-offs:
VFR day	085°, 265°	085°, 265°
VFR night	265°	085°, 265°
 H24  JET A-1  NIL  NIL		
Rescue and fire service: Cat. H1		